



# PRESENTS

## MR400 POWER PACK


ART. NR. 40044

A real power pack with 4 batteries and 4 chargers in the same case. Perfect for work groups and teams who have to solve a task without access to electricity. 4 fully charged batteries means 1000 meters of climbing (1 kilometer).

Approved for Cargo Aircraft transport.  
Markings – Li-Ion – on the outside of the case.

### PRODUCT LIST:

- 1 pcs hard case with wheels and extensible handle
- 4 pcs Batteries
- 4 pcs Battery charger

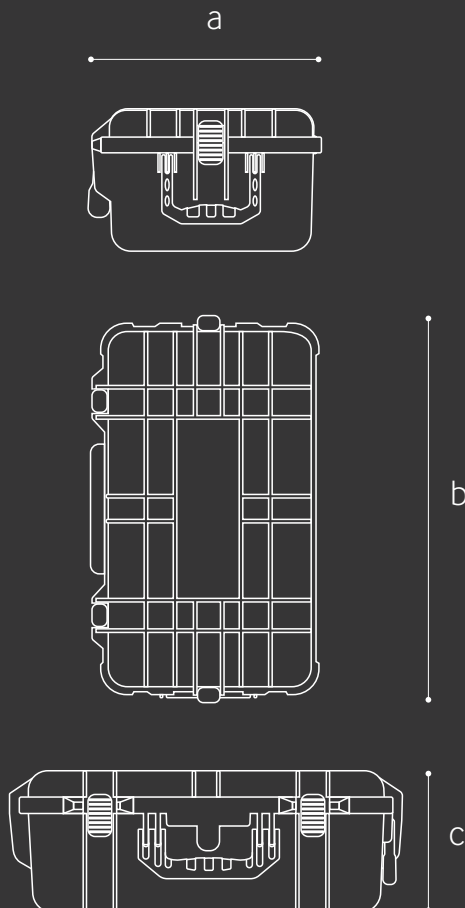

## MEASURE

a: 340 mm (13.4 in)

b: 560 mm (22 in)

c: 230 mm (9 in)

Weight incl. 4 pcs batteries: 18,6 kg (41 lbs)

Strengths: Robust, Gas- and Waterproof (IP 68).



## DESCRIPTION

This is a proper King Size – “Power Bank” which contains 4 batteries tightly placed in high quality foam. Beneath each battery lies an accompanying battery charger. A very well thought-out Mr Ronin product for safe transport and handling in extreme environments.


This hard case is easy to transport and minimizes the risk of wear during transport and when your equipment should be sent somewhere else through and external forwarder.

A perfect solution for you who need a “Power Bank” in an emergency vehicle.

The bag has the correct Cargo marking (Li-Ion) for transport by Air, Sea and Land Cargo.

### PRODUCT LIST:

- 1 pcs hard case with wheels and extensible handle
- 4 pcs Batteries
- 4 pcs Battery charger

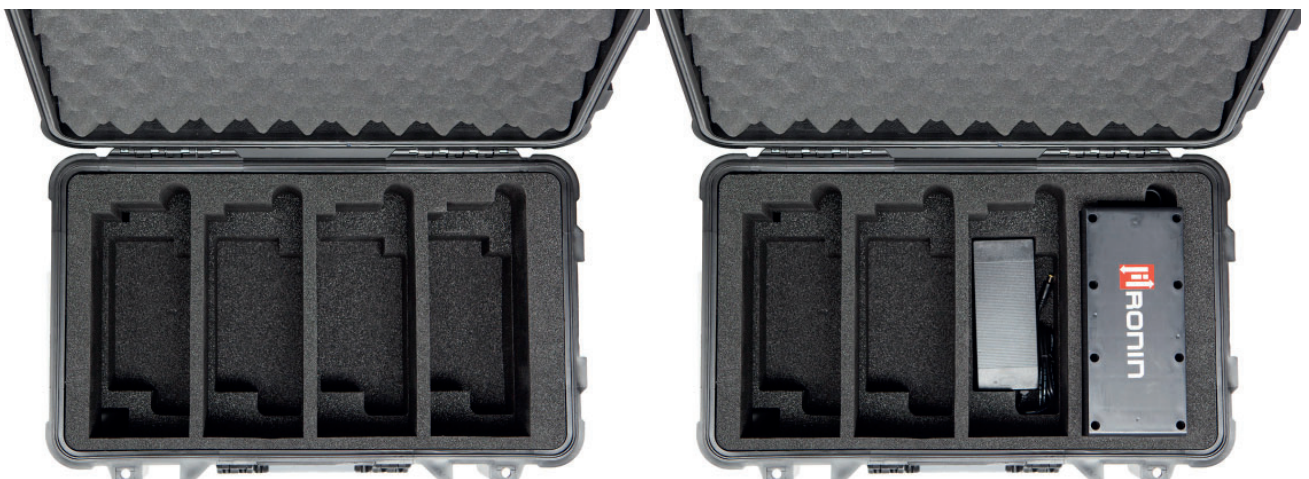



## SPECIFICATIONS

### METRIC SYSTEM:

Measurements:	560 x 340 x 230 cm
Weight HC:	7 kg
Weight HC incl. 4 pcs batteries:	18,6 kg
HC Strength:	Robust, Gas and Water proof
Operating Temp:	-20 C till 60 C
Recommended Temp:	-20 C till 40 C
Foam:	Stiff. Oil and Water resistant
Ingress Protection (IP):	IP68
Battery Life Ascent Temp Range 20C - 40C	
(91kg)	259 m
(181 kg)	137 m
Battery Life Ascent Temp Range 0C - 20C	
(91 kg)	152 m
(181 kg)	76 m
Battery Life Ascent Temp Range -20C - 0C	
(91 kg)	76 m
(181 kg)	54 m

### IMPERIAL SYSTEM:

Measurements:	20 x 15 x 10 in
Weight HC:	15,4 lbs
Weight HC incl. 4 pcs batteries:	41 lbs
HC Strength:	Robust, Gas and Water proof
Operating Temp:	4 – 140 F
Recommended Temp:	Between -4 and 104 F
Foam:	Stiff. Oil and Water resistant
Ingress Protection (IP):	IP68
Battery Life Ascent Temp Range 68F - 104F	
(200 lbs)	849 ft
(400 lbs)	449 ft
Battery Life Ascent Temp Range 32F - 68F	
(200 lbs)	498 ft
(400 lbs)	249 ft
Battery Life Ascent Temp Range -4F - 32F	
(200 lbs)	249 ft
(400 lbs)	177 ft

## PRODUCT IMAGES



## CONTACT

MR RONIN  
Telephone: +46 (0) 8 550 333 00  
Mail: info@mrroinin.com

Open Hours: 10:00 – 19:00  
09:00 – 18:00 CET time

Mr Ronin / Envici AB  
Org.nr: 556932-9740

## POSTAL ADDRESS:

MR RONIN  
P.O Box 3089  
SE-103 61 Stockholm  
SWEDEN